


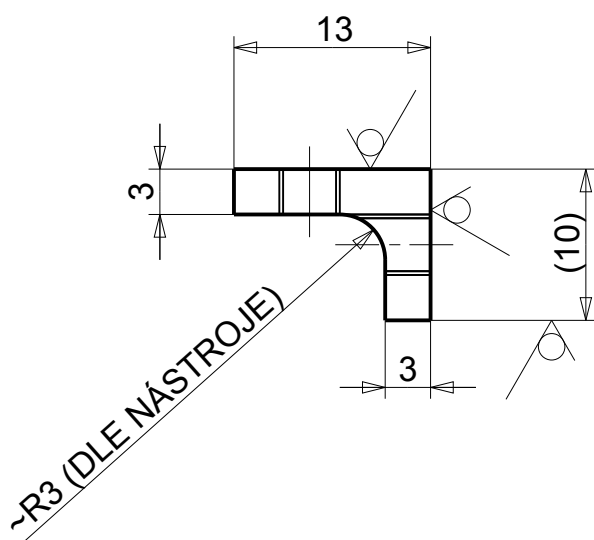


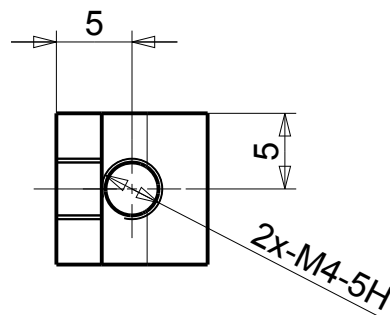

3.2/ (✓)

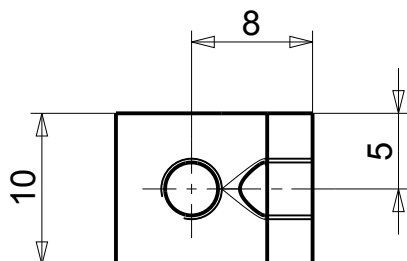

1,2,4 5 ZNACENI PODLE AEN 1004

## 1. HRANY SRAZENY

MATERIAL				-	-	-		-	-
D16T				-	-	-		-	-
POLOTOVAR OBD - 20x10 - 10				-	-	-		-	-
UPRAVA POVRCHU				-	-	-		-	-
AEN 5402-220a(cerny)				NOVÝ	EQZ00014	1524		11.6.12	SMAK R.
HMOTNOST 0.001 kg				INDEX	ZMENA	OD	DO	DATUM	PODPIS
MERITKO		PROMITANI			DATUM	PODPIS		DATUM	PODPIS
2:1	DELKOVE ROZMERY mm		NAVRHL	11.6.12	KRAPEK D.	STATIK			
	PRESNOST ISO 2768 - mK		KRESLIL	11.6.12	SMAK R.	NORM.REF.			
	TOLEROVANI ISO 8015		KONTROLA			SCHVALIL			
		NAZEV					SK.SLED.	TYP EPOS	
		UHELNIK					-	SESTAVA Q7 10-00 01	
		CISLO VYKRESU					INDEX	-	
		Q7 10-07 21					-	LIST : 1	
							LISTU: 1		
Pro/ENGINEER - NAZEV VYKRESU				Q7_10-07_21_UHELNIK				Pro/PDM-Version:	
Pro/ENGINEER - NAZEV MODELU				Q7_10-07_21_UHELNIK				Pro/PDM-Version:	